




GAS SENSE

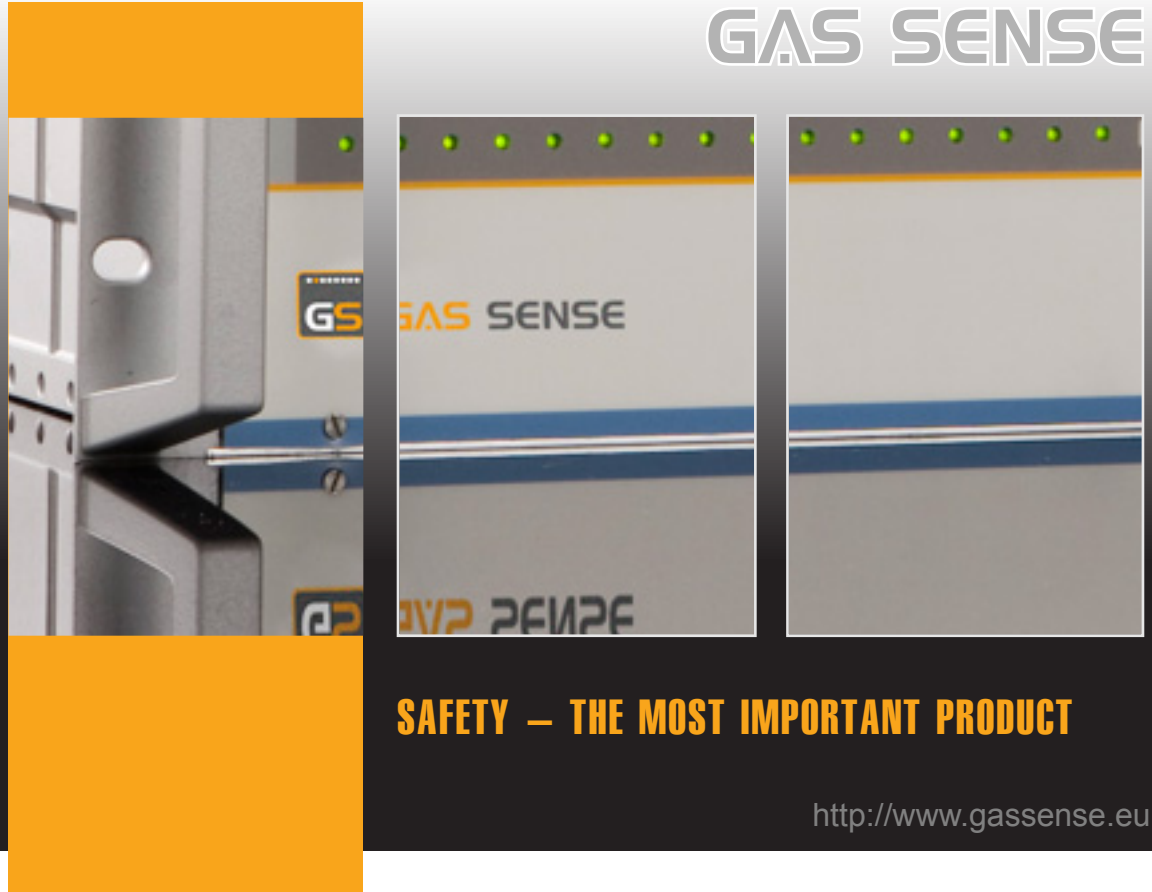

SAFETY – THE MOST IMPORTANT PRODUCT

<http://www.gassense.eu>

Gas Controllers GA-ADR

Addressable for 8-16 lines

- 8 - 16 controlled lines
- three alarm levels
- line and sensor self diagnostics
- light and sound indication
- relay outputs
- multiple power supply
- ATEX certificate Ex II 2G EEx Ia IIc T5

products:

GA-ADR.L.08

GA-ADR.L.16

Application:

Addressable Gas Controllers are compatible with GS-ADR. For combustible gas control the input lines are intrinsically safe and each one is connected to one sensor. For toxic gas control the controllers could be connected to three addressable devices.

GAS SENSE

INVEST ELECTRONICS


Gas Controllers GA-ADR



Technical Specifications

GA-ADR.L.08

GA-ADR.L.16

controlled lines	8	16
maximum sensors	32	48
dimensions [mm]	270 x 132 x 198	484 x 132 x 198
intrinsically safe lines	yes	
signalization levels	3	
maintained sensors	GS-ADR	
output signal for 10% LEL / TWA	sound / LED / SPDT, 250V/5A	
output signal for 20% LEL / TWA	sound / LED / SPDT, 250V/5A	
output signal for FAULT	sound / LED / SPDT, 250V/5A	
power supply	220 V / 50 Hz	
battery supply	12 V DC	
power consumption	24W	48W
operating temperature	-20 ÷ 50 °C	
humidity	30 ÷ 95 % RH (non-condensing)	
pressure	the atmosphere pressure ±10%	
explosion proof	 II 2G EEx Ia IIC T5	



INVEST ELECTRONICS LTD

145 Brezovsko shose str. Plovdiv 4003, Bulgaria
 tel. +359-32-960143 fax: +359-32-960144
 e-mail: info@investelectronics.com

GAS SENSE

<http://www.gassense.eu>